

HTURGB OUTDOOR FULL COLOR LED DISPLAY P10

Special-design for engineer customers and have aluminum and iron cabinets to be choose



P10

It can be widely used in a variety of outdoor.


As a high maturity conventional products on the market, excellent properties for our products.

Features:


- 1、 Reasonable structure design, can be completed for fast fixed installation.
- 2、 All the cabinets are done the waterproof test which can ensure its waterproof properties.
- 3、 The cabinet of the upper and lower with positioning holes and positioning column.
- 4、 Independent rear cover and lock design, both moisture-proof, dustproof, and can facilitate fast debugging and maintenance to cabinet.,
- 5、 The cabinet size:960x960mm, pixel density: 10000dots/m², brightness: ≥6000NIT, is suitable for any outdoor occasion.
- 6、 The led display is designed with high-quality lamps, even if under the intense sunlight, still be able to show a clear image and picture so it's a ideal choice for the outdoor advertising, the outdoor stadium, a large Plaza.

P10 CABINET PHOTOS

CABINET FRONT VIEW

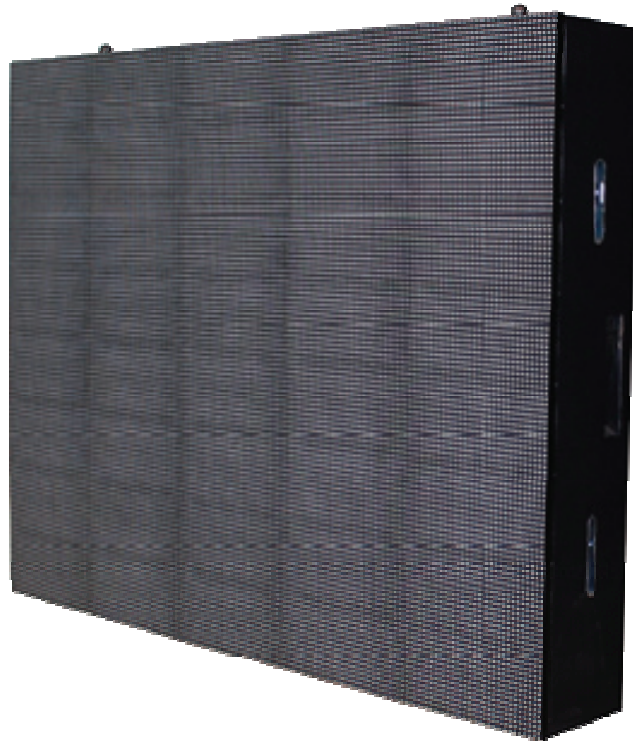

CABINET BACK VIEW

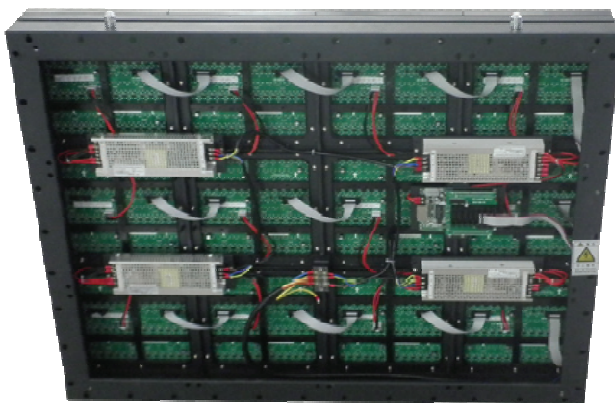

Simple iron cabinet




Standard iron cabinet

Technical specification

Model	P10
Pixel pitch	10mm
Pixel configuration	1R1G1B
LED type	SMD3535
Module size	320 x 160mm
Module resolution	32x16
Cabinet resolution	96x96
Cabinet size	960x960mm
Density	10000dots/m ²
Brightness	6000-6500 NIT
Scan method	1/2 or 1/4
Best view distance	≥10m
Max. power consumption	800W/m ²
Ave. power consumption	300W/m ²
Cabinet Weight	≤40Kg
Grey scale	8192 step
Color	6.87 billion
Refresh rate	≥960Hz
Best view	Vertical 120° Horizontal 120°
Brightness adjustment	256 level
Frame frequency	≥60Hz
Out of control pixel rate	<1/10000
MTBF	>5000 hours
Lifespan	50000 hours
Signal input source	Composite, S-video, Component, VGA, DVI, HDMI, SDI, HD-SDI
Working voltage	AC 110/220v 50-60Hz
Control distance	Ethernet cable: 100m, Multi-mode optical fiber: 500m, Singel-mode optical fiber: 20km
Operation temperature	-20 to +40
Working humidity	10% to 80%
Protection level	IP65 front, IP43 back




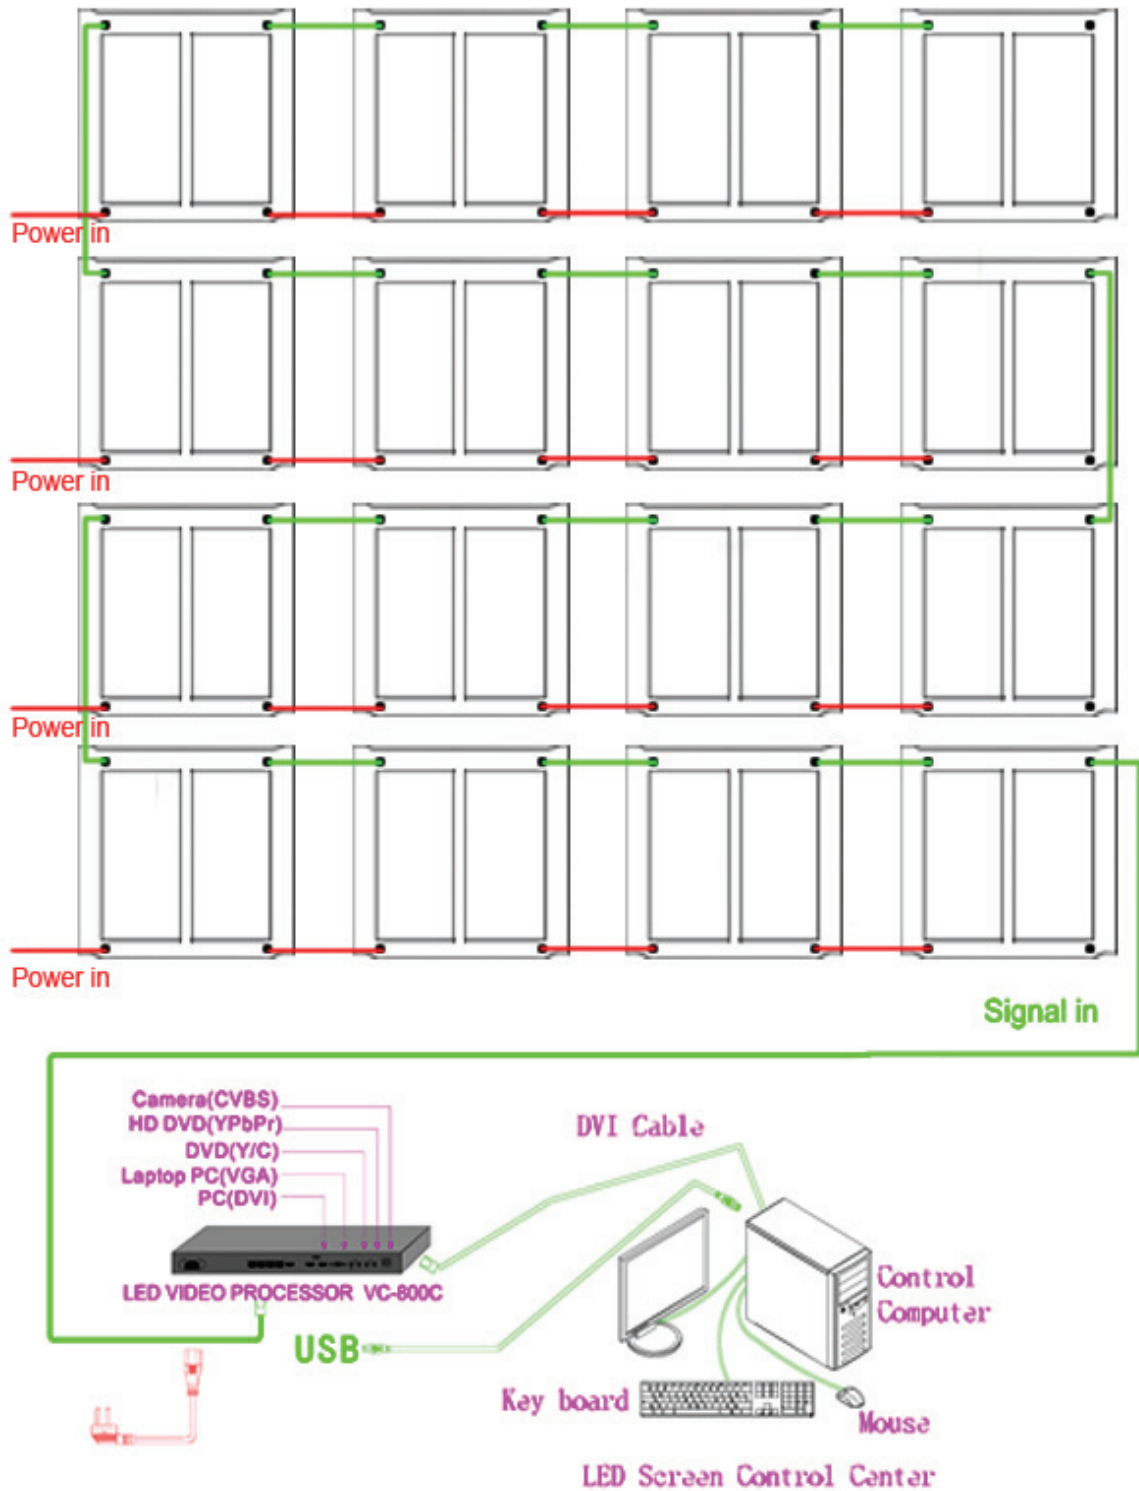


P10 SYSTEM CONNECTION DIAGRAM



Product show



Installation Mode

		
<p>Suspension Mode</p>	<p>Floor Mode</p>	<p>Flushbonading Mode</p>
		
<p>Wall Mounting Mode</p>	<p>Double Support Mode</p>	<p>Unipole Mode</p>

PACKING



纸箱包装
Carton packing



航空箱包装
Flight case packing



木箱包装
Wooden box packing